




REV		DESCRIPTION		DATE		APPROVED	
-	B	Add two missing dimensions Corrected 2 Errors in drawing		7-24-2000 10-03-2000			

Without connectors

- 00
- 08
- 10
- 18
- 20
- 22
- 25
- 28
- 30
- 32
- 35
- 38
- 40
- 42
- 45
- 48
- 50
- 52
- 55
- 58
- 60
- 62
- 65
- 68
- 70
- 72
- 75
- 78
- 80
- 82
- 85
- 88
- 90
- 92
- 95
- 98
- 100




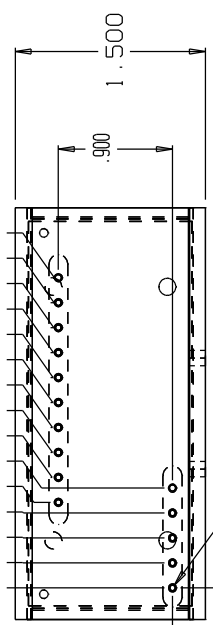


Ø .050 Typ 15 Plcs  
Tol. +/- .015 typ 2 plcs

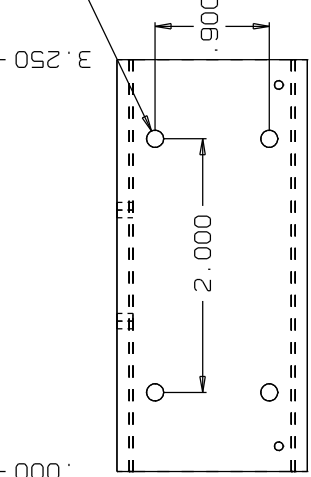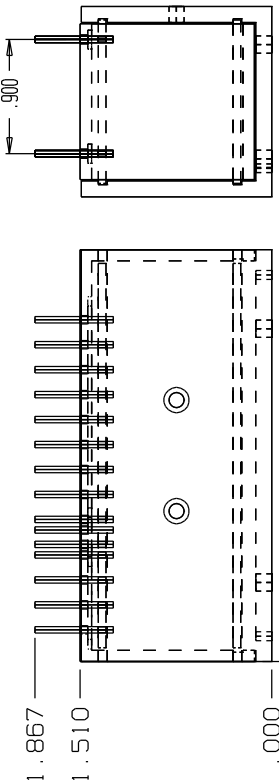

8-32 Typ. 4 Plcs  
User mounting thread  
Max. Penetration is .125  
Circuit is protected by  
isolation barrier

With Wieland connectors

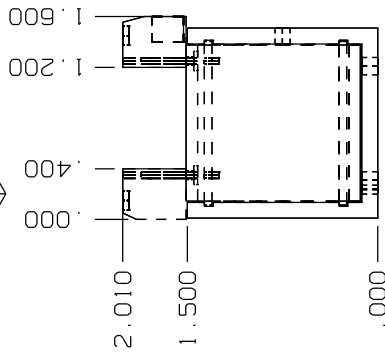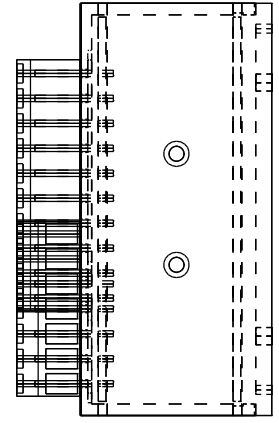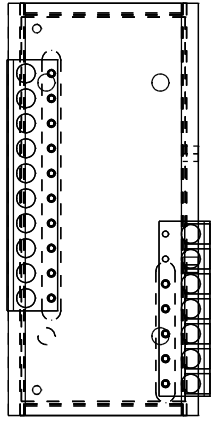

Connectors:  
7 position  
Wieland 25.600.2753.0  
10 position  
Wieland 25.600.3053.0

Add "C" Suffix to  
include connectors

CyberPak Co.

Assembled CY-41/42/C Drawing

Dimensions in inches  
Tol. +/- .010

630-627-5854	SIZE B	FSCM NO.	DWG NO.	REV B
cyberpakco.com	SCALE None		1011-ENCOO	SHEET 1 of 1